



EXOR EFB CAR BATTERY SERIES

EXOR EFB batteries, specially designed for cars equipped with advanced start-stop systems, is a must choice for car owners equipped with start-stop systems.

Specification:

Nominal Voltage(V)	12V
Capacity (20hr to10.5V)	70Ah @25°C(77°F)
Dimensions	L260mm XW173mm X228mm
Weight	Approx 20.0Kg(44.09lbs)
CCA(-18°C/0°F)	650A@ to 6.0V
CCA @25°C(77°F)	760A
Reserve Capacity (25A,10.5V)	145min @25°C(77°F)
Operating Temperature range	-30°C ~ 70°C(-22°F ~ 158°F)
Acceptable charging current	0 ~ 21A
Charge Voltage @25°C(77°F)	14.5V ~ 15.0V
Self-discharge@25°C(77°F)	< 8% (Store for 90 days)
Case Materials	High temperature resistant PP materials
Terminal	Tapered terminal (Left:negative;Right:Positive)








Product standard:

- ☒ EN 50342
- ☒ VDA
- ☒ GB/T5008.1-2013
- ☒ JB/T12666

Product Features:

- Ultra-low resistance separator, reducing battery self-discharge;
- Strong starting,the engine can be started in low temperature or low charging state;
- Stamping multiple lead-calcium-tin alloy grids, corrosion resistance, less water loss, extended service life of the battery at high temperature;
- Unique sealing structure design,minimize water loss and extends battery life.
- Using high-conductivity lead alloy casting and welding,TTP welding technology,good starting performance under high-current.

Dimensions(mm):

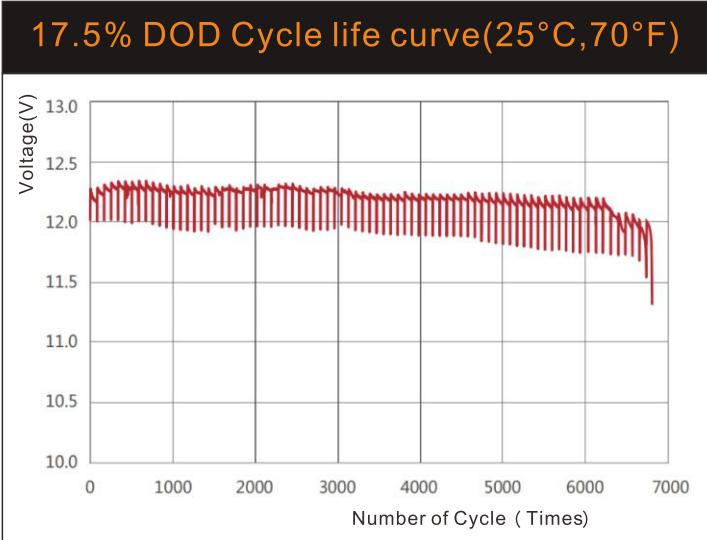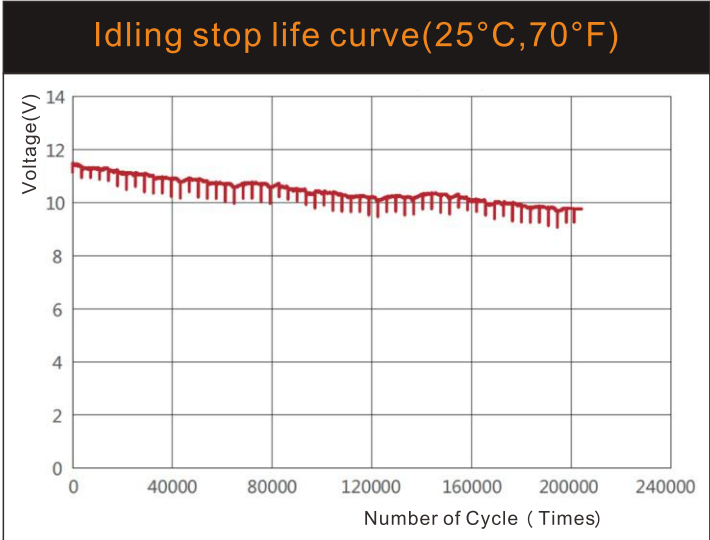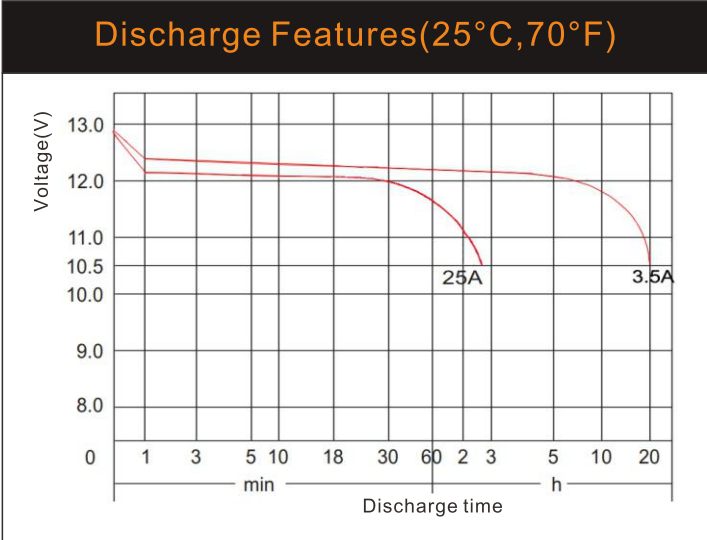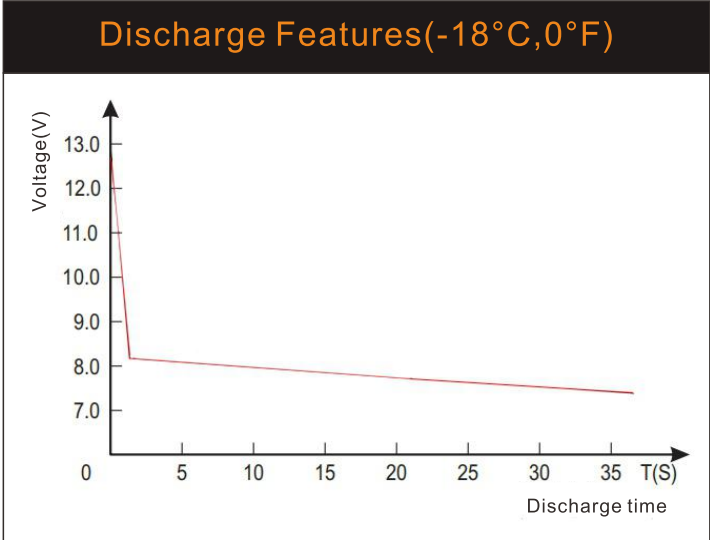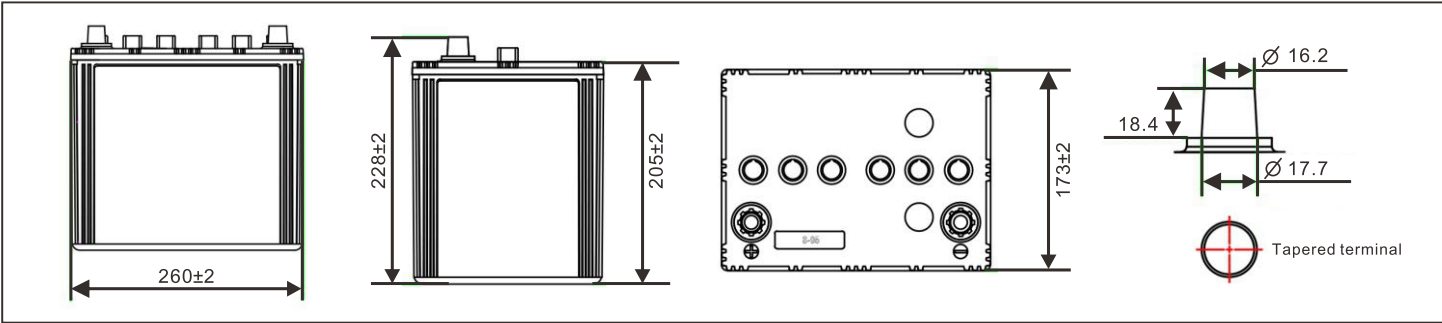



EXOR EFB CAR BATTERY SERIES

EXOR EFB batteries, specially designed for cars equipped with advanced start-stop systems, is a must choice for car owners equipped with start-stop systems.

Specification:

Nominal Voltage(V)	12V
Capacity (20hr to10.5V)	60Ah @25°C(77°F)
Dimensions	L242mm XW175mm X190mm
Weight	Approx 17.0Kg(37.48lbs)
CCA(-18°C/0°F)	500A@ to 6.0V
CCA @25°C(77°F)	600A
Reserve Capacity (25A,10.5V)	120min @25°C(77°F)
Operating Temperature range	-30°C ~ 70°C(-22°F ~ 158°F)
Acceptable charging current	0 ~ 18A
Charge Voltage @25°C(77°F)	14.5V ~ 15.0V
Self-discharge@25°C(77°F)	< 8% (Store for 90 days)
Case Materials	High temperature resistant PP materials
Terminal	Tapered terminal (Left:negative;Right:Positive)








Product standard:

- ☒ EN 50342
- ☒ VDA
- ☒ GB/T5008.1-2013
- ☒ JB/T12666

Product Features:

- Ultra-low resistance separator, reducing battery self-discharge;
- Strong starting,the engine can be started in low temperature or low charging state;
- Stamping multiple lead-calcium-tin alloy grids, corrosion resistance, less water loss, extended service life of the battery at high temperature;
- Unique sealing structure design,minimize water loss and extends battery life.
- Using high-conductivity lead alloy casting and welding,TTP welding technology,good starting performance under high-current.

Dimensions(mm):

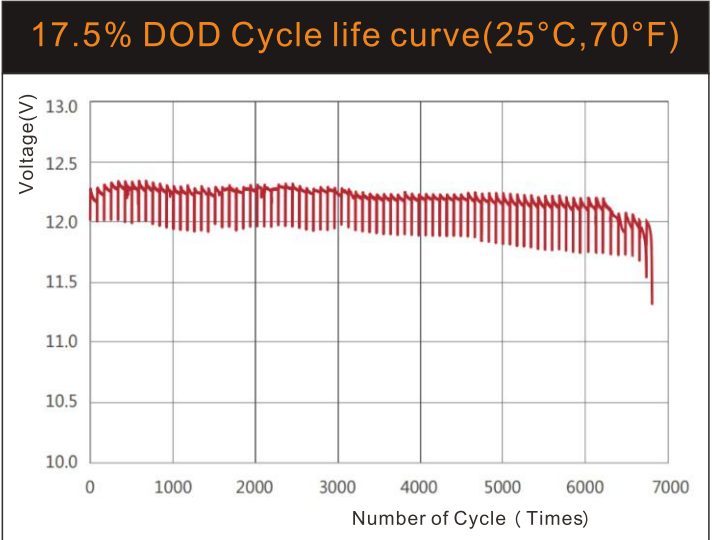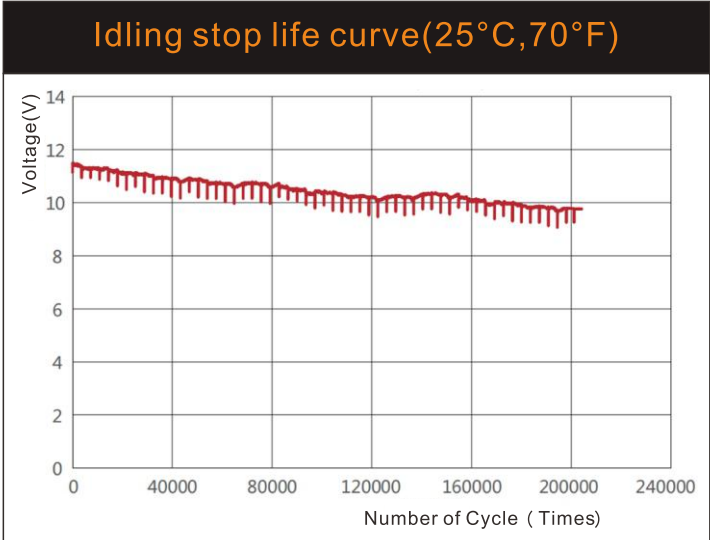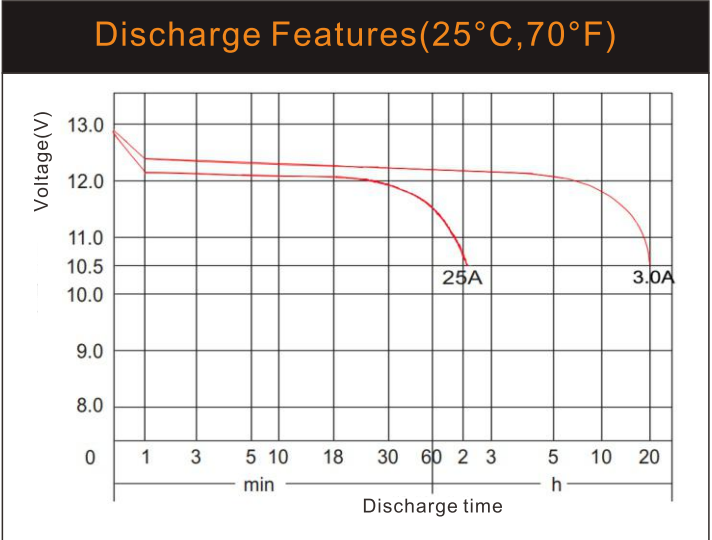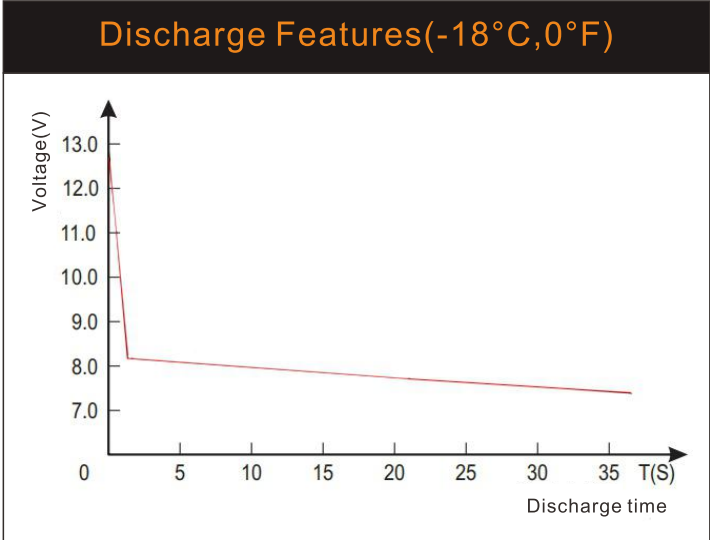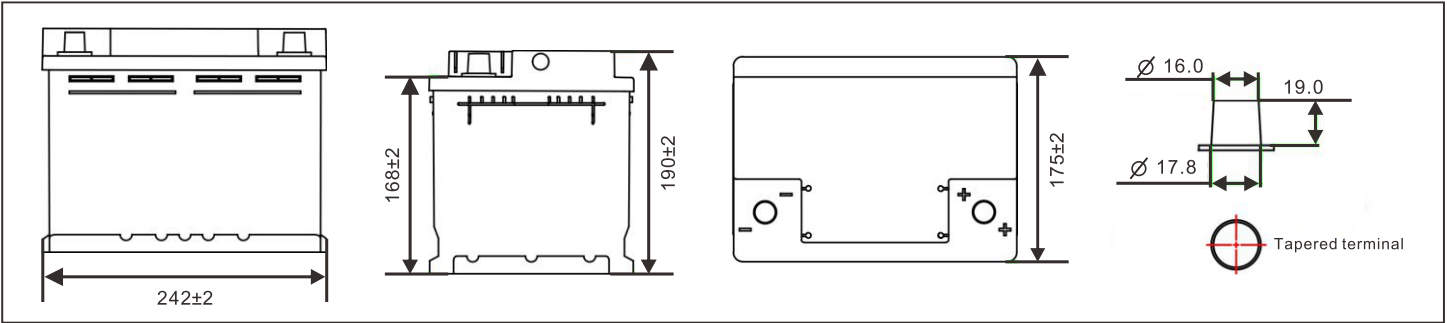



EXOR EFB CAR BATTERY SERIES

EXOR EFB batteries, specially designed for cars equipped with advanced start-stop systems, is a must choice for car owners equipped with start-stop systems.

Specification:

Nominal Voltage(V)	12V
Capacity (20hr to10.5V)	60Ah @25°C(77°F)
Dimensions	L232mm XW173mm X228mm
Weight	Approx 17.0Kg(37.48lbs)
CCA(-18°C/0°F)	500A@ to 6.0V
CCA @25°C(77°F)	600A
Reserve Capacity (25A,10.5V)	120min @25°C(77°F)
Operating Temperature range	-30°C ~ 70°C(-22°F ~ 158°F)
Acceptable charging current	0 ~ 18A
Charge Voltage @25°C(77°F)	14.5V ~ 15.0V
Self-discharge@25°C(77°F)	< 8% (Store for 90 days)
Case Materials	High temperature resistant PP materials
Terminal	Tapered terminal (Left:negative;Right:Positive)








Product standard:

- ☒ EN 50342
- ☒ VDA
- ☒ GB/T5008.1-2013
- ☒ JB/T12666

Product Features:

- Ultra-low resistance separator, reducing battery self-discharge;
- Strong starting,the engine can be started in low temperature or low charging state;
- Stamping multiple lead-calcium-tin alloy grids, corrosion resistance, less water loss, extended service life of the battery at high temperature;
- Unique sealing structure design,minimize water loss and extends battery life.
- Using high-conductivity lead alloy casting and welding,TTP welding technology,good starting performance under high-current.

Dimensions(mm):

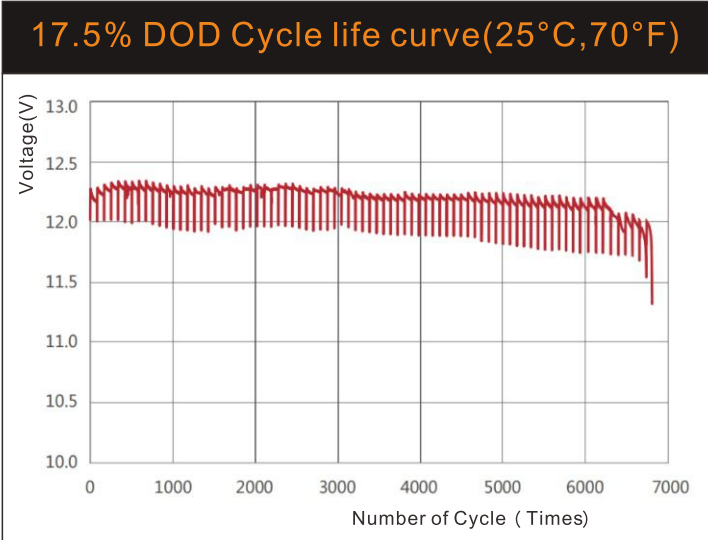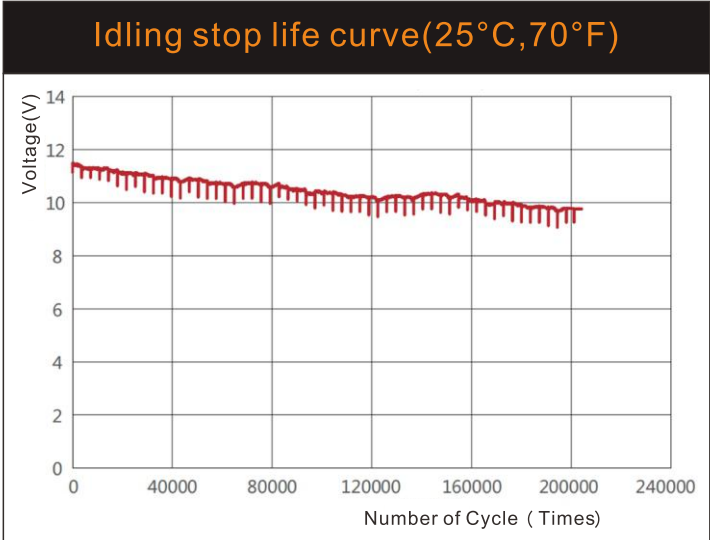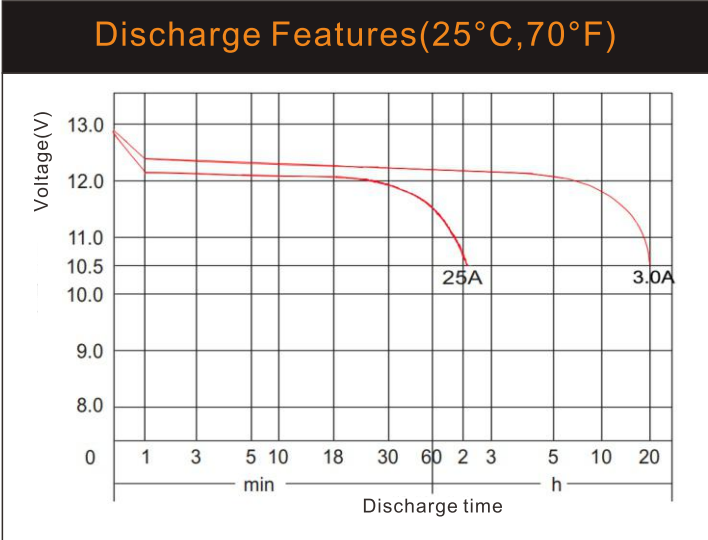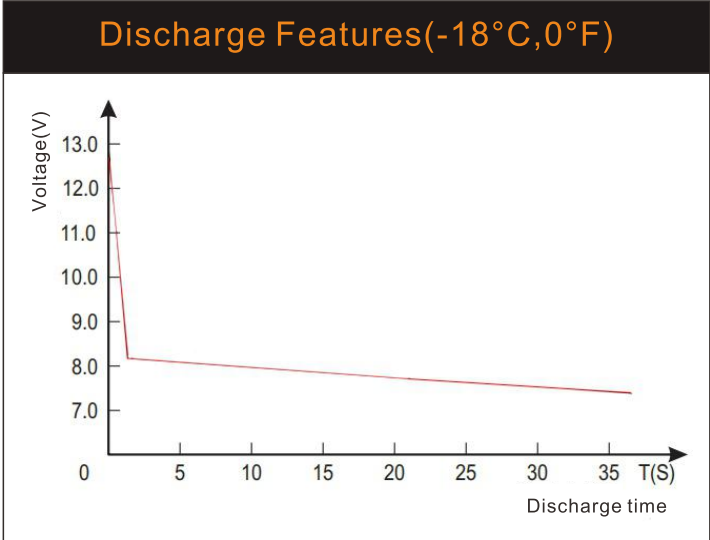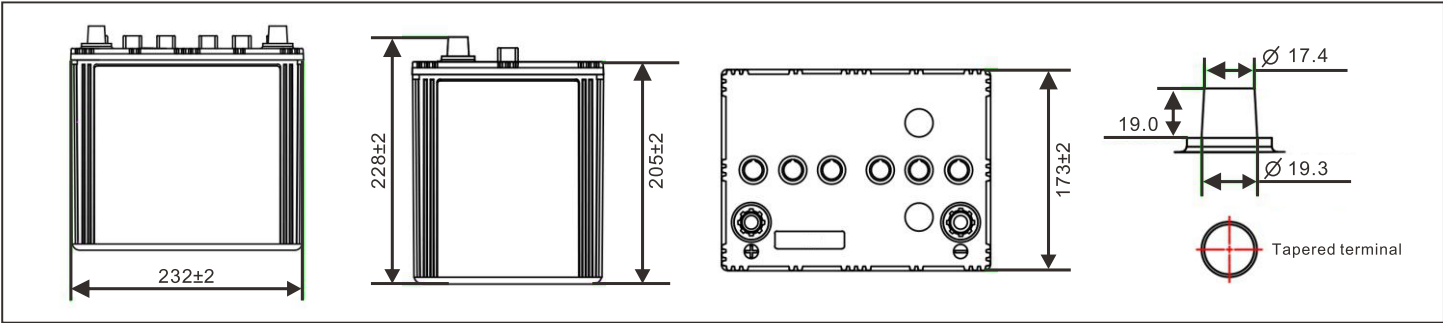



EXOR EFB CAR BATTERY SERIES

EXOR EFB batteries, specially designed for cars equipped with advanced start-stop systems, is a must choice for car owners equipped with start-stop systems.

Specification:

Nominal Voltage(V)	12V
Capacity (20hr to10.5V)	70Ah @25°C(77°F)
Dimensions	L278mm XW175mm X190mm
Weight	Approx 20.0Kg(44.09lbs)
CCA(-18°C/0°F)	650A@ to 6.0V
CCA @25°C(77°F)	680A
Reserve Capacity (25A,10.5V)	130min @25°C(77°F)
Operating Temperature range	-30°C ~ 70°C(-22°F ~ 158°F)
Acceptable charging current	0 ~ 21A
Charge Voltage @25°C(77°F)	14.5V ~ 15.0V
Self-discharge@25°C(77°F)	< 8% (Store for 90 days)
Case Materials	High temperature resistant PP materials
Terminal	Tapered terminal (Left:negative;Right:Positive)



Product standard:

- ☒ EN 50342
- ☒ VDA
- ☒ GB/T5008.1-2013
- ☒ JB/T12666

Product Features:

- Ultra-low resistance separator, reducing battery self-discharge;
- Strong starting,the engine can be started in low temperature or low charging state;
- Stamping multiple lead-calcium-tin alloy grids, corrosion resistance, less water loss, extended service life of the battery at high temperature;
- Unique sealing structure design,minimize water loss and extends battery life.
- Using high-conductivity lead alloy casting and welding,TTP welding technology,good starting performance under high-current.

Dimensions(mm):

